


# BASES DE TOMA/OUTLET SOCKETS

## SERIE BSD 300

Freq. (MHz)	5	68	88	108	125	862	950	2300
TV	████████				████████			
FM	████████		████████					
SAT							████████	

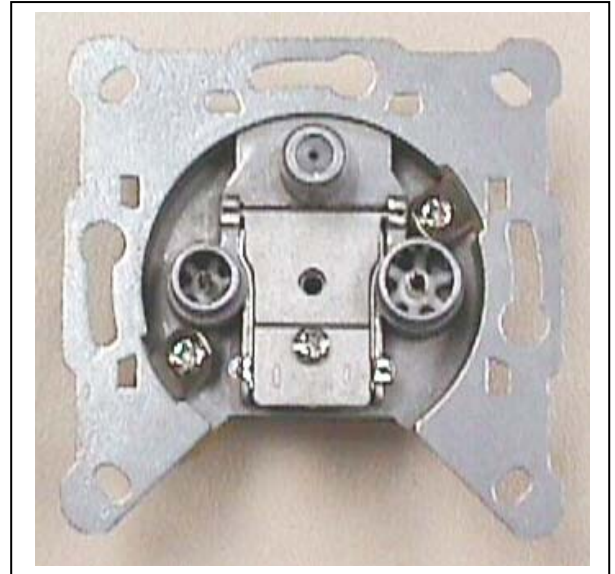

### CARACTERÍSTICAS/SPECIFICATIONS

Modelo	Model			BSD 301 (Final)	BSD 310 (Cascade)
Referencia	Reference			86233	86234
Salidas	Outputs			3 (TV/FM/SAT)	
Banda cubierta	Bande coverage		MHz	5-2300	
Atenuación de paso	Through losses		5-2300 MHz	dB	-
Atenuación de derivación	Derivation losses	TV	5-68 MHz	dB	1
			125-862 MHz	dB	1,5
			88-108 MHz	dB	1
		SAT	950-2300 MHz	dB	2
Aislamiento	Isolation	FM-TV	5-68 MHz	dB	20
			88-108 MHz	dB	20
			125-862 MHz	dB	20
		FM-SAT	88-108 MHz	dB	20
		TV-SAT	5-860 MHz	dB	20
Conectores salida	Output connectors			TV	IEC 9,5 mm (m/m)
				FM	IEC 9,5 mm (h/f)
				SAT	F (h/f)
Dimensiones embalaje (20 un)	Packing dimensions (20 un)			mm	300 x 165 x 85
Peso (20 un.)	Weight (20 un)			Kg	2
Paso de corriente	DC pass				SAT-IN / SAT-IN / OUT-IN

Diseñados y fabricados siguiendo los requerimientos de las Directivas Europeas 2004/108/EC (EMC), 2006/95/EC (LVD), 2001/65/EC (RoHS), aplicando las siguientes normas: EN 60728-11:2006 y EN 50083-2: 2006.

Designed and manufactured following European Directives requirements: 2004/108/EC (EMC), 2006/95/EC (LVD), 2001/65/EC (RoHS), applying next standards: EN 60728-11:2006 and EN 50083-2:2006.

**Fagor Electrónica, S.Coop.**  
 San Andrés, s/n.  
 E-20500 Mondragón (Spain)  
 Tel. +34 43 712526  
 Fax +34 43 712893  
 E- mail: rf.sales@fagorelectronica.es  
 www.fagorelectronica.com

