FAGOR

SAFE 100 Series
SURGE ARRESTER 90 V

Surge arrester to protect the installation against atmospheric discharges.

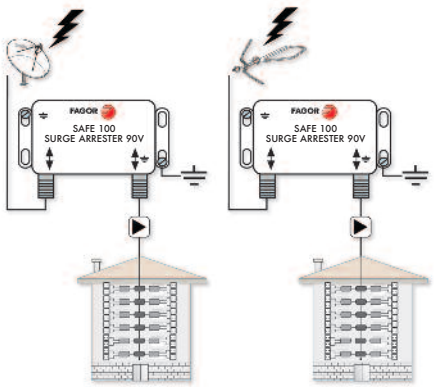

MODEL		SAF E 100
Reference		85040
Frequency band	MHz	0-2150
Insertion Losses	dB	0,5
Return Losses	dB	12
Impedance	Ω	75
Connectors		F (f)
DC spark over voltage @ 100V/s	V	90
Impulse spare-over voltage @1 KV/µs		600
Impulse discharge current 10 times	KA	5
Insulation Resistance at 100 Vdc	GOhm	10
DC pass	mA	500

LTE PROTECTION FILTERS

LBF Series

Low pass filters for protection againts interfering LTE signals.

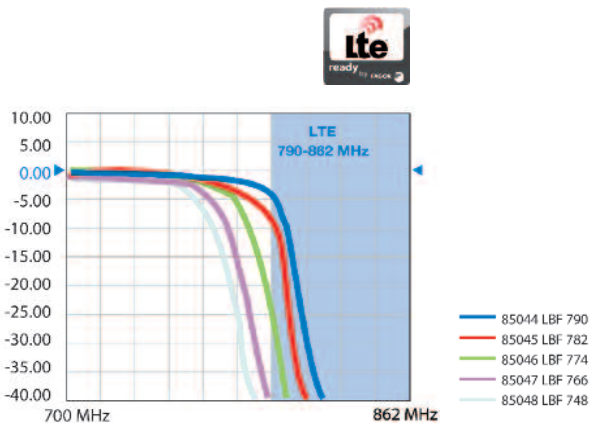

MODEL		LBF 790	LBF 782	LBF 774	LBF 766	LBF 758
Reference		85044	85045	85046	85047	85048
Pass Band	MHz	5÷790	5÷782	5÷774	5÷766	5÷758
Rejected Band	MHz	822÷2200	814÷2200	806÷2200	798÷2200	790÷2200
Rejection	dB	≥ 45				
Through loss	dB	≤ 1,5				
Return loss	dB	≥ 12				
Type of connector		F(m)-F(f)				