


DIAC

DO-204AH (DO-35 Glass)



BREAKOVER VOLTAGE 32 V **ON-STATE CURRENT** 2.0 Amps

FEATURES

- Glass hermetically sealed
- Low breakover current
- Silicon Bidirectional with excellent symmetry
- Very low leakage current
- Solder dip 260°C, 3.5s
- Component in accordance to RoHS 2011/65/EU and WEEE 2002/96/EC
- Meets MSL level 1, per J-STD-020, LF maximum peak of 260° C



RoHS
COMPLIANT

MECHANICAL DATA

- **Case:** DO-204AH (DO-35 Glass).
- **Polarity:** As marked on the body.
- **Terminals:** Matte tin plated leads, solderable per MIL-STD-750 Method 2026, J-STD-002 and JESD22-B102. Consumer grade, meets JESD 201 class 1A whisker test.

TYPICAL APPLICATIONS

Functioning as a trigger diode with a fixed voltage reference, the FD02 series can be used in conjunction with triacs for simplified gate control circuits or as a starting element in fluorescent lamp ballasts and other switching functions like universal-motor speed control, and heat control..

Maximun Ratings and Electrical Characteristics at 25°C

SYMBOL	PARAMETER	CONDITIONS	Min.	Typ.	Max.	Unit
P_{tot}	Total Power Dissipation on printed circuit (L = 10mm)	$T_a = 65^\circ\text{C}$			150	mW
I_{TRM}	Repetitive peak on-state current	$t_p = 20 \mu\text{s}$, $f = 120 \text{ Hz}$			2	A
T_{stg}	Storage Temperature Range		-40		+125	°C
T_j	Operating Junction Temperature		-40		+125	°C
T_{sld}	Soldering Temperature	$5 \leq \text{max.}$			260	°C
$R_{th(j-a)}$	Junction to Ambient				400	°C/W
$R_{th(j-l)}$	Junction to leads				150	°C/W

PART NAMES	FD0200YR	FD0201YR	FD0202YR	FD0230YR
MARKING CODE	FD0200YR	FD0201YR	FD0202YR	FD0230YR

DIAC


Electrical Characteristics at Tamb = 25 °C

SYMBOL	PARAMETER	CONDITIONS	VALUE				Unit	
			00	01	02	30		
V_{BO}	Breakover Voltage *	$I_{BO}, C = 22nF$ ** (see Figure 1)	MIN	28	30	30	28	V
			TYP	32	32	32	32	
			MAX	36	35	34	36	
$ V_{BO+} - V_{BO-} $	Breakover Voltage Symmetry	$I_{BO}, C = 22nF$ ** (see Figure 1)	MAX	± 3			V	
$ \Delta V_{\pm} $	Dynamic breakover voltage *	$\Delta I = [I_{BO} \text{ to } I_F = 10 \text{ mA}]$ (see Figure 2)	MIN	5	9	9	5	V
V_O	Output Voltage *	(see Figure 3)	MIN	5			V	
I_{BO}	Breakover Current *	$C = 22 \text{ nF}$ **	MAX	50	15	15	50	μA
t_r	Rise Time *	(see Figure 4)	TYP	1.5			μs	
I_B	Leakage Current *	$V_B = 0.5 V_{BO} \text{ max}$ (see Figure 1)	MAX	10			μA	
I_P	Peak Current *	see Figure 3 (Gate)	MIN	0.3			A	

* Applicable to both forward and reverse directions.

** Connected in parallel with the devices.


Part Number Information

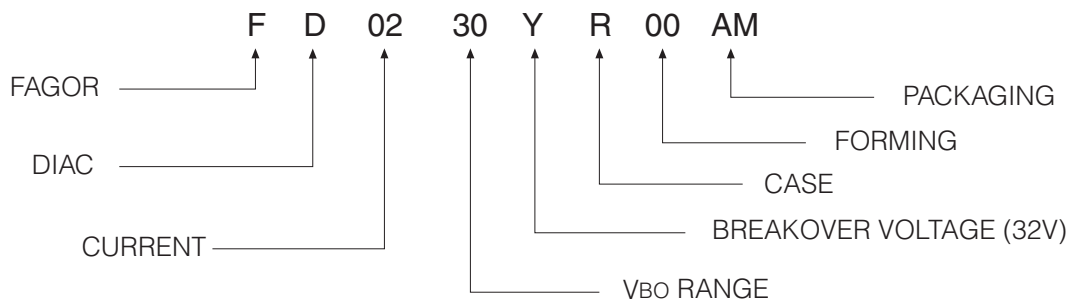

Ordering information

PREFERRED P/N	PACKAGE CODE	DELIVERY MODE	BASE QUANTITY	UNIT WEIGHT (g)
FD0200YR 00AM	AM	AMMO BOX	5.000	0.219
FD0200YR 00TR	TR	14" diameter tape and reel	10.000	0.219

Package Outline Dimensions: (mm) DO-204AH (DO-35 Glass)

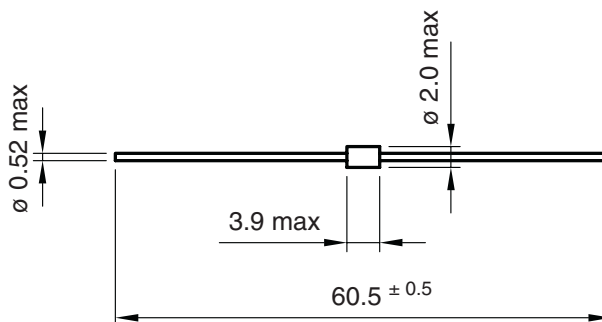

Mounting instructions:

1. Min. distance from body to soldering point, 4 mm.
2. Do not bend lead at a point closer than 2 mm. to the body.

DIAC

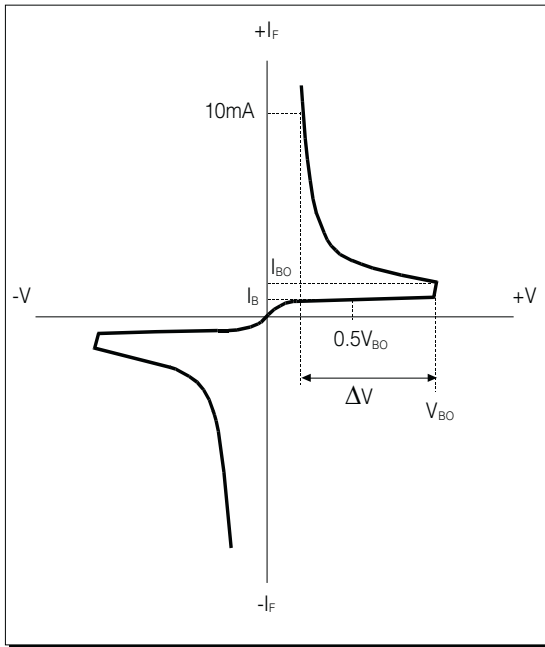


FIGURE 1: Voltage - current characteristic curve.

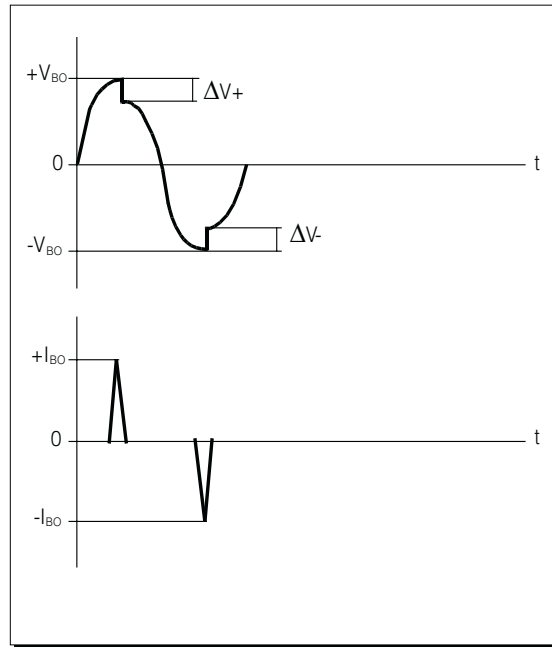


FIGURE 2

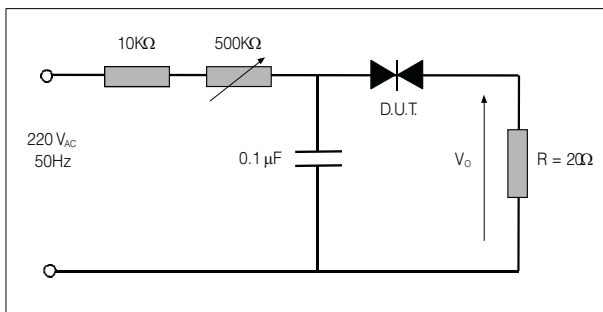


FIGURE 3: Test Circuit for Output Voltage.

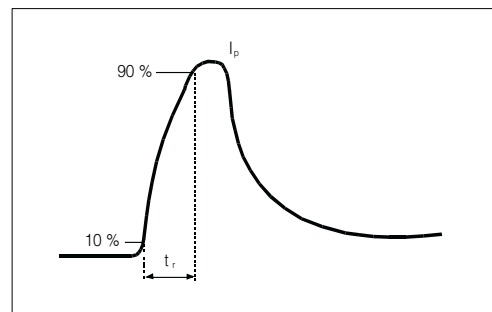


FIGURE 4: Rise time measurement.

DIAC

Ratings and Characteristics (Ta 25 °C unless otherwise noted)

Fig. 1: Relative variation of VBO versus junction temperature (typical values)

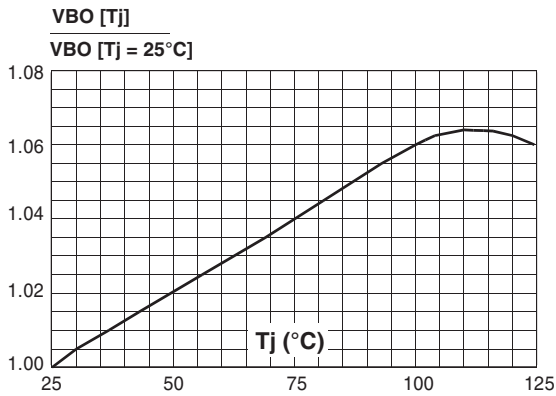


Fig. 2: Repetitive peak pulse current versus pulse duration (maximum values).

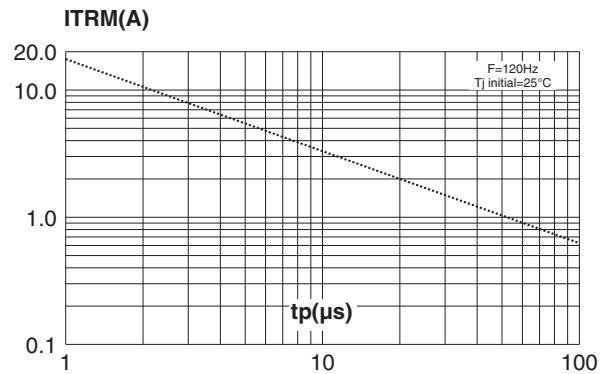


Fig. 3: Time duration while current pulse is higher 50mA versus C and Rs (typical values).


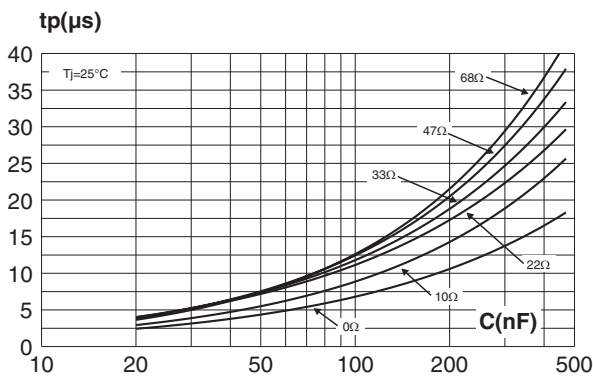


Fig.4: Power dissipation versus ambient temperature (maximum values)

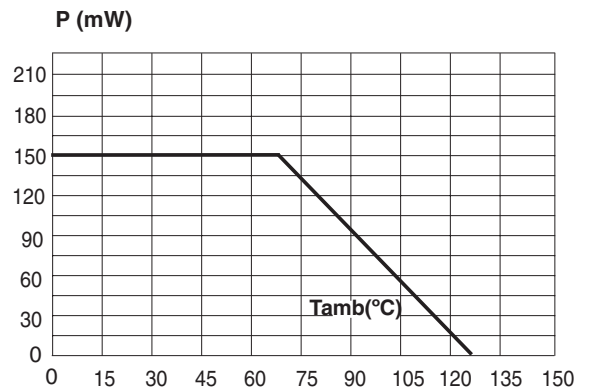

Revision History

Date	Revision	Description of Changes
14-Apr-2012	0	Original Data Sheet
7-May-2014	1	Modify Marking instruction

Disclaimer

All product, product specifications and data are subject to change without notice to improve reliability, function or design or otherwise.

Fagor Electrónica, S.Coop., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Fagor"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Fagor makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Fagor disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Fagor's knowledge of typical requirements that are often placed on Fagor products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Fagor's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Fagor products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Fagor product could result in personal injury or death. Customers using or selling Fagor products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Fagor and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Fagor or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Fagor personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Fagor, Product names and markings noted herein may be trademarks of their respective owners.