

FAN Series



SIGNAL RECEPTION


UHF antennas for easy installation, obtaining important time economies and optimum electrical characteristics. They are designed to receive both vertical or horizontal polarization signals. The wide range of models allows to cover a large variety of existing signals.

APPLICATION

Analogue and Digital Terrestrial TV Installations, both individual or community.


CHARACTERISTICS

- Quick and easy antenna mounting since ergonomical wing nuts are provided.
- Tool-less set up of the reflectors.
- A built-in broadband symmetrizer guarantees life-long performance of the antenna.

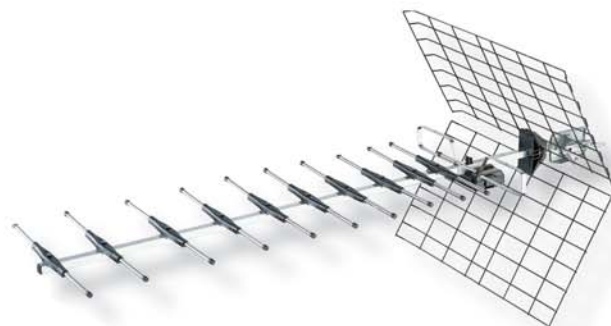

MODEL	FAN 1369	FAN 2369	FAN 4337	FAN 4351	FAN 4369	FAN 10337	FAN 10351	FAN 10369
Reference	81369	82369	84337	84351	84369	80337	80351	80369
Channels	21 ... 69	21 ... 69	21 ... 37	21 ... 51	21 ... 69	21 ... 37	21 ... 51	21 ... 69
Gain	10,5	12,5	14,5			16,5		
Impedance	75							
Return losses	9							
Front-to-back ratio	25							
Horizontal opening angle	54	40	33			22		
Windload	130 km/h 150 km/h	50 69	54 74	70 97		112 154		
Length	474	818	1.267	1.232	1.253	2.442	2.390	2.490
Units per package	6	4	5	6		3		
Packing dimensions	1300 x 505 x 165		1300 x 505 x 255			1300 x 505 x 255		
Weight	10	8	9	11		9		

GAIN RESPONSE

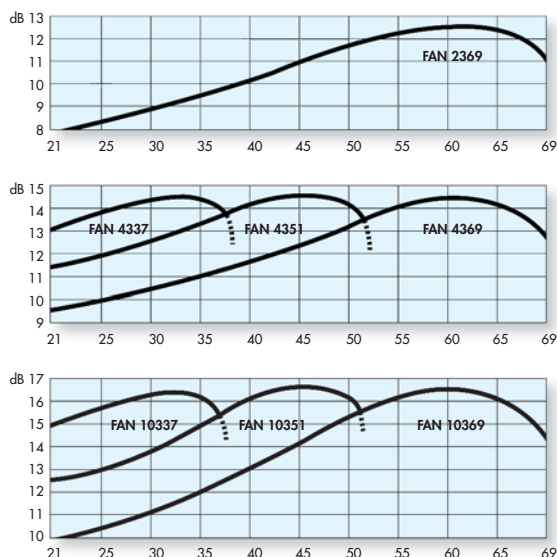

HORIZONTAL OPENING DIAGRAM

