


- E** FILTRO LTE PARA INTEMPERIE
- F** FILTRE EXTÉRIEUR LTE
- UK** OUTDOOR LTE FILTER




Serie LBF


E	F	UK		LBF -E 766	LBF -E 782
Referencia	Référence	Reference		85057	85055
Nº Entradas/Salidas	Nbre.d'entrées/sorties	Nº Inputs/Outputs		1/1	1/1
Banda de paso	Bande passante	Pass band		DC - CH 57	DC - CH 59
Atenuación en banda de paso	Atténuation de la bande passante	Passband attenuation	dB	1	1
Rechazo en banda LTE (791-862 MHz)	Rejection bande LTE (791-862 MHz)	LTE band rejection (791-862 MHz)	dB	60	60
Rechazo en banda GSM-TETRA (870-960 MHz)	Rejection bande GSM-TETRA (870-960 MHz)	GSM-TETRA band rejection (870-960 MHz)		60	60
Paso de corriente	Passage d'alimentation	DC pass	mA	24V/300	
Dimensiones	Dimensions	Dimensions	mm	100 x 87 x 45	
Temperatura de funcionamiento	Température de fonctionnement	Operating temperature	°C	10 ± 50	
Peso	Poids	Weight	Kg	0,16	

LBF E-766

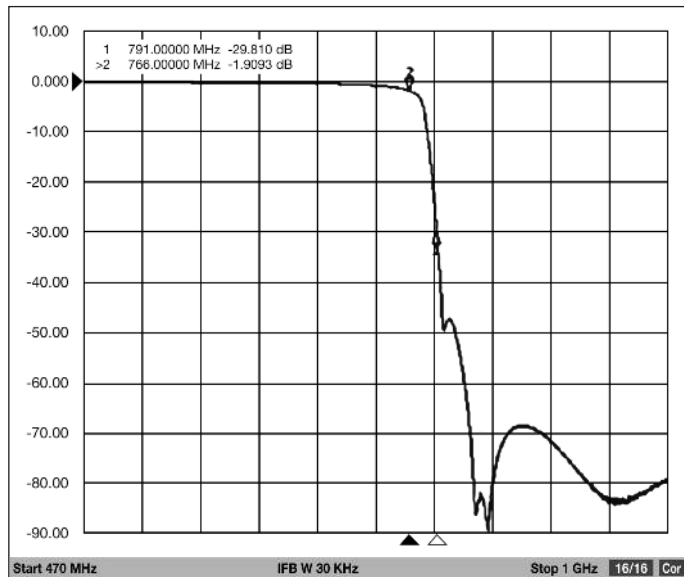


LBF E-782

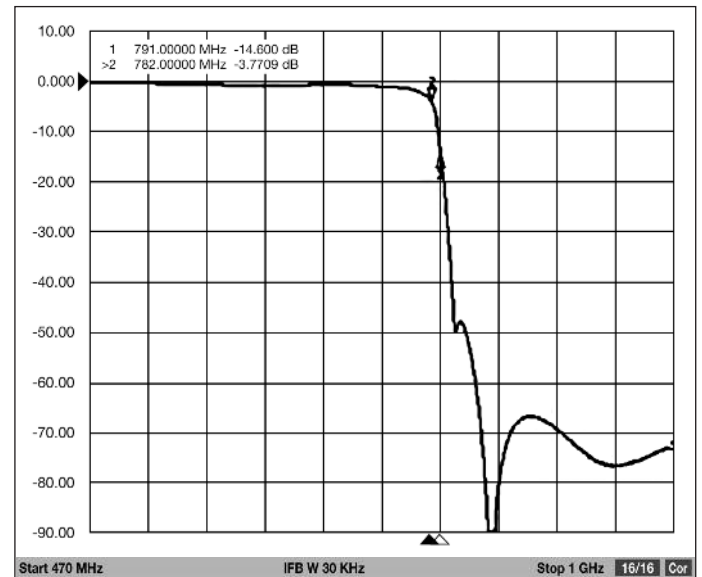

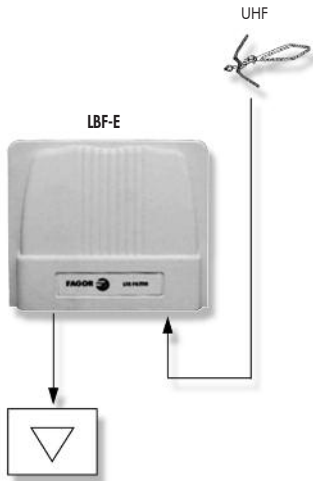

Declaration: <https://www.fagorelectronica.com/es/recepcion-tv/productos>



Fagor Electrónica, S.Coop.
San Andrés, s/n.
E-20500 Mondragón (Spain)
Tel. +34 943 712 526
Fax +34 943 712 893
E- mail: rf.sales@fagorelectronica.es
www.fagorelectronica.com

