



TEDI
5000 HD



**HIGH & STANDARD
DEFINITION
DTT RECEIVER
TEDI 5000 HD**




HIGH & STANDARD DEFINITION DTT RECEIVER

TEDI 5000 HD

CARACTÉRISTIQUES

- **DVB-T**, MPEG-4, MPEG-2 standard.
- USB 2.0. port
- HDMI 1.3b. output
- "Time Shift" via USB 2.0. with recording option.
- Media player: plays photos, music, videos.. (MP3, JPEG, BMP and OGC files).
- Screen-format 16:9/4:3
- DVB EN300743 teletext and DVB ETS300472 teletext by VBI and OSD.
- Parental lock.
- Auto save function for last channel used.
- Low consumption.

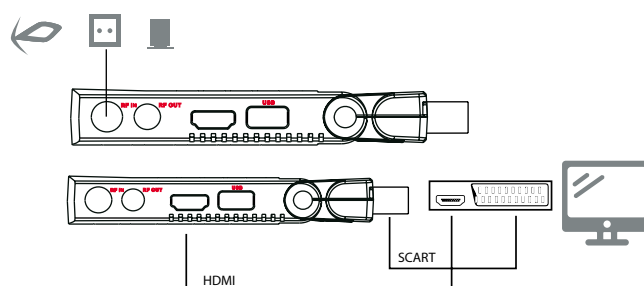

MODELO	Tedi 5000 HD
Referencia	86537
Power supply voltage AC	90 ~ 250V; 50/60Hz
Standby	0.5 W MAX.
Power consumption (max)	10 W
Input impedance	75 Ohm
Input connector	RF IEC female, 9.5mm
Input frequency	VHF:173.5MHz-230MHz UHF:474MHz - 866MHz
Input level range	64QAM:-78.5 ~ -8.75dBm / 16QAM:-84 ~ -8.75dBm / QPSK:-90.3 ~ -8.75dBm
RF channel bandwidth	6, 7, 8 MHz
HDMI output	19 PIN female; HDMI 1.3b
IR Input	IR minijack 3.5mm
USB	USB 2.0
Constellation	QPSK, 16QAM, 64QAM
Video decode	MPEG2 ISO/IEC 13818-2 MP@ML, H.264 (MPEG4 part 10) 4.1/MPEG-2 MP@HL
Video resolution	480i,480p,576i,576p,720p,1080i,1080p
Audio decode	MPEG-1, MPEG-2 (Layer I/II), MP3, AC-3 (Dolby Digital), AAC-LC, WMA
Audio mode	Left/Right/Stereo/Mono
Operating temperature range	0-40° C
Weight	0.90 gr.

Fagor Electrónica, S.Coop.

San Andrés, s/n. E-20500 Mondragón (Spain)
 Tel.: +34 943 71 25 26 Fax: +34 943 71 28 93
 E-mail: rf.sales@fagorelectronica.es
www.fagorelectronica.com

